


# Original Range

## Mild Steel Zinc Protected:



Original Range Jubilee® Clips in zinc protected mild steel are the most popular clips in our range. Ideally suited for most day to day requirements for joining hose in areas such as the automotive industry and the automotive aftermarket, agricultural applications, such as irrigation and farm machinery, pneumatic and hydraulic applications in the industrial sector, hardware/DIY applications and in construction.

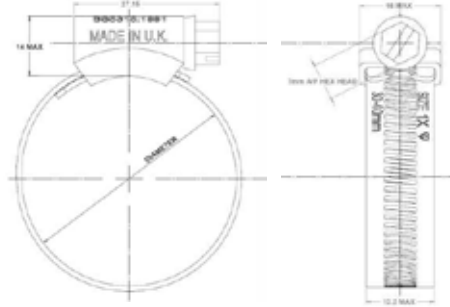

| Part No.  | BS No. | Adjustment mm | Adjustment Inches | Band Width mm | Band Thickness mm | Recommended Torque Nm | Maximum Torque Nm | Maximum Pressure PSI | Part No.  |
|-----------|--------|---------------|-------------------|---------------|-------------------|-----------------------|-------------------|----------------------|-----------|
| 000-MS    | 12     | 9.5- 12       | 3/8- 1/2          | 9.9           | 0.762             | 3.4                   | 4.5               | 203                  | 000-MS    |
| MOO-MS    | 16     | 11- 16        | 1/2-5/8           | 9.9           | 0.762             | 3.4                   | 4.5               | 203                  | MOO-MS    |
| OO-MS     | 20     | 13- 20        | 1/2-3/4           | 9.9           | 0.762             | 3.4                   | 4.5               | 203                  | OO-MS     |
| O-MS      | 22     | 16- 22        | 5/8- 7/8          | 13.0          | 0.914             | 4.2                   | 5.6               | 203                  | O-MS      |
| OX-MS     | 25     | 18- 25        | 3/4-1             | 13.0          | 0.914             | 4.2                   | 5.6               | 203                  | OX-MS     |
| 1A-MS     | 30     | 22- 30        | 7/8-1 1/8         | 13.0          | 0.914             | 5.1                   | 6.8               | 203                  | 1A-MS     |
| 1-MS      | 35     | 25- 35        | 1-1 3/8           | 13.0          | 0.914             | 5.1                   | 6.8               | 102                  | 1-MS      |
| 1X-MS     | 40     | 30- 40        | 1 1/8-1 5/8       | 13.0          | 0.914             | 5.1                   | 6.8               | 102                  | 1X-MS     |
| 1M-MS     | 45     | 32- 45        | 1 1/4-1 3/4       | 13.0          | 0.914             | 5.1                   | 6.8               | 102                  | 1M-MS     |
| 2A-MS     | 50     | 35- 50        | 1 3/8-2           | 13.0          | 0.914             | 5.9                   | 7.9               | 102                  | 2A-MS     |
| 2-MS      | 55     | 40- 55        | 1 5/8-2 1/8       | 13.0          | 0.914             | 5.9                   | 7.9               | 102                  | 2-MS      |
| 2X-MS     | 60     | 45- 60        | 1 3/4 -2 3/8      | 13.0          | 0.914             | 5.9                   | 7.9               | 102                  | 2X-MS     |
| 3-MS      | 70     | 55- 70        | 2 1/8-2 3/4       | 13.0          | 0.914             | 6.7                   | 9                 | 102                  | 3-MS      |
| 3X-MS     | 80     | 60- 80        | 2 3/8-3 1/8       | 13.0          | 0.914             | 6.7                   | 9                 | 44                   | 3X-MS     |
| 4-MS      | 90     | 70- 90        | 2 3/4-3 1/2       | 13.0          | 0.914             | 6.7                   | 9                 | 44                   | 4-MS      |
| 4X-MS     | 100    | 85-100        | 3 1/4-4           | 13.0          | 0.914             | 6.7                   | 9                 | 44                   | 4X-MS     |
| 5-MS      | 120    | 90-120        | 3 1/2-4 3/4       | 13.0          | 0.914             | 6.7                   | 9                 | 44                   | 5-MS      |
| 6-MS      | 140    | 110-140       | 4 3/8-5 1/2       | 13.0          | 0.914             | 6.7                   | 9                 | 44                   | 6-MS      |
| 6X-MS     | 150    | 120-150       | 4 3/4-5 7/8       | 13.0          | 0.914             | 6.7                   | 9                 | 18                   | 6X-MS     |
| 7-MS      | 165    | 135-165       | 5 1/4-6 1/2       | 13.0          | 0.914             | 5.9                   | 7.9               | 18                   | 7-MS      |
| 7 1/2-MS  | 190    | 158-190       | 6 1/4-7 1/2       | 13.0          | 0.914             | 5.9                   | 7.9               | 18                   | 7 1/2-MS  |
| 8 1/2-MS  | 216    | 184-216       | 7 1/4-8 1/2       | 13.0          | 0.914             | 5.9                   | 7.9               | 18                   | 8 1/2-MS  |
| 9 1/2-MS  | 242    | 210-242       | 8 1/4-9 1/2       | 13.0          | 0.914             | 5.9                   | 7.9               | 18                   | 9 1/2-MS  |
| 10 1/2-MS | 267    | 235-267       | 9 1/4-10 1/2      | 13.0          | 0.914             | 5.9                   | 7.9               | 18                   | 10 1/2-MS |
| 11 1/2-MS | 292    | 260-292       | 10 1/4-11 1/2     | 13.0          | 0.914             | 5.9                   | 7.9               | 18                   | 11 1/2-MS |
| 12 1/2-MS | 318    | 286-318       | 11 1/4-12 1/2     | 13.0          | 0.914             | 5.9                   | 7.9               | 18                   | 12 1/2-MS |

For larger sizes please contact us

**Corrosion Resistance:** 240 hours NSS Test

**Fastening:** 7mm A/F screw

**Industry Recommendations:-**

**Quality Assurance:-**



Mild Steel Zinc Protected

The finest hose clip in the world

# Original Range

## Mild Steel Zinc Protected:



The most versatile of clips in the Jubilee® range, our Original Range Jubilee® hose clips in 304 (18/8) stainless steel are widely used across all industries where hose clips are used to secure hoses, as well as for other applications. Their corrosion resistance enables their use in the marine, oil and gas and food sectors, as well as the agricultural, hardware and industrial sectors, where higher corrosion resistance is required.



| Part No.  | BS No. | Adjustment mm | Adjustment Inches | Band Width mm | Band Thickness mm | Recommended Torque Nm | Maximum Torque Nm | Maximum Pressure PSI | Part No.  |
|-----------|--------|---------------|-------------------|---------------|-------------------|-----------------------|-------------------|----------------------|-----------|
| 000-SS    | 12     | 9.5- 12       | 3/8- 1/2          | 9.9           | 0.762             | 3.4                   | 4.5               | 203                  | 000-SS    |
| M00-SS    | 16     | 11- 16        | 1/2-5/8           | 9.9           | 0.762             | 3.4                   | 4.5               | 203                  | M00-SS    |
| 00-SS     | 20     | 13- 20        | 1/2-3/4           | 9.9           | 0.762             | 3.4                   | 4.5               | 203                  | 00-SS     |
| 0-SS      | 22     | 16- 22        | 5/8- 7/8          | 13.0          | 0.914             | 4.2                   | 5.6               | 203                  | 0-SS      |
| OX-SS     | 25     | 18- 25        | 3/4-1             | 13.0          | 0.914             | 4.2                   | 5.6               | 203                  | OX-SS     |
| 1A-SS     | 30     | 22- 30        | 7/8-1 1/8         | 13.0          | 0.914             | 5.1                   | 6.8               | 203                  | 1A-SS     |
| 1-SS      | 35     | 25- 35        | 1-1 3/8           | 13.0          | 0.914             | 5.1                   | 6.8               | 102                  | 1-SS      |
| 1X-SS     | 40     | 30- 40        | 1 1/8-1 5/8       | 13.0          | 0.914             | 5.1                   | 6.8               | 102                  | 1X-SS     |
| 1M-SS     | 45     | 32- 45        | 1 1/4-1 3/4       | 13.0          | 0.914             | 5.1                   | 6.8               | 102                  | 1M-SS     |
| 2A-SS     | 50     | 35- 50        | 1 3/8-2           | 13.0          | 0.914             | 5.9                   | 7.9               | 102                  | 2A-SS     |
| 2-SS      | 55     | 40- 55        | 1 5/8-2 1/8       | 13.0          | 0.914             | 5.9                   | 7.9               | 102                  | 2-SS      |
| 2X-SS     | 60     | 45- 60        | 1 3/4 -2 3/8      | 13.0          | 0.914             | 5.9                   | 7.9               | 102                  | 2X-SS     |
| 3-SS      | 70     | 55- 70        | 2 1/8-2 3/4       | 13.0          | 0.914             | 6.7                   | 9                 | 102                  | 3-SS      |
| 3X-SS     | 80     | 60- 80        | 2 3/8-3 1/8       | 13.0          | 0.914             | 6.7                   | 9                 | 44                   | 3X-SS     |
| 4-SS      | 90     | 70- 90        | 2 3/4-3 1/2       | 13.0          | 0.914             | 6.7                   | 9                 | 44                   | 4-SS      |
| 4X-SS     | 100    | 85-100        | 3 1/4-4           | 13.0          | 0.914             | 6.7                   | 9                 | 44                   | 4X-SS     |
| 5-SS      | 120    | 90-120        | 3 1/2-4 3/4       | 13.0          | 0.914             | 6.7                   | 9                 | 44                   | 5-SS      |
| 6-SS      | 140    | 110-140       | 4 3/8-5 1/2       | 13.0          | 0.914             | 6.7                   | 9                 | 44                   | 6-SS      |
| 6X-SS     | 150    | 120-150       | 4 3/4-5 7/8       | 13.0          | 0.914             | 6.7                   | 9                 | 18                   | 6X-SS     |
| 7-SS      | 165    | 135-165       | 5 1/4-6 1/2       | 13.0          | 0.914             | 5.9                   | 7.9               | 18                   | 7-SS      |
| 7 1/2-SS  | 190    | 158-190       | 6 1/4-7 1/2       | 13.0          | 0.914             | 5.9                   | 7.9               | 18                   | 7 1/2-SS  |
| 8 1/2-SS  | 216    | 184-216       | 7 1/4-8 1/2       | 13.0          | 0.914             | 5.9                   | 7.9               | 18                   | 8 1/2-SS  |
| 9 1/2-SS  | 242    | 210-242       | 8 1/4-9 1/2       | 13.0          | 0.914             | 5.9                   | 7.9               | 18                   | 9 1/2-SS  |
| 10 1/2-SS | 267    | 235-267       | 9 1/4-10 1/2      | 13.0          | 0.914             | 5.9                   | 7.9               | 18                   | 10 1/2-SS |
| 11 1/2-SS | 292    | 260-292       | 10 1/4-11 1/2     | 13.0          | 0.914             | 5.9                   | 7.9               | 18                   | 11 1/2-SS |
| 12 1/2-SS | 318    | 286-318       | 11 1/4-12 1/2     | 13.0          | 0.914             | 5.9                   | 7.9               | 18                   | 12 1/2-SS |

For larger sizes please contact us

**Corrosion Resistance:** 1000 hours NSS Test

**Fastening:** 7mm A/F screw

**Industry Recommendations:-**



**Quality Assurance:-**

**304 Stainless Steel**

